EZ26

Tracked Zero Tail Excavator

Powerful all-rounder

The EZ26 guarantees flexibility and user-friendliness with high performance features. The low weight allows transport, including of attachments, by car trailer. The wide field of vision around the machine from the cab increases the safety of the operator and the construction site environment. It also ensures constant control of the working environment. The simultaneously high performance and high operating comfort thanks to the wide access, jog-dial operating system and clear machine display make the EZ26 a feel-good zone for the operator.

Highlights

- Air-conditioning system
- Very good all-round visibility
- Easy transportation by car trailer
- Zero Tail
- Auto-stop function
- Optimized hydraulics or engine-pump management

Technical Data

Hydraulic

Operating pressure hydraulics	240.0 bar

Mechanical - Output Details

Nominal rotation speed	2,350.0 1/min
Travel speed	4.3 km/h

Mechanical Details

Length	4,199.0 mm
Width	1,550.0 mm
Height	2,412.0 mm
Operating weight (min.-max.)	2,455.0 - 3,358.0 kg
Digging depth (max.)	2,803.0 mm

Engine

Cooling	Water-cooling
Engine type	Diesel engine
Cylinder capacity	1,266.0 cm3
Inclined position max.	30.0 °
Fuel	HVO EN15940
Effective power	14.6 KW
Nominal Engine speed	2,350.0 1/min
Starter battery Voltage	12.0 V
Engine Manufacturer	Yanmar
Engine Designation	3TNV80F-NPWN

Environment Data

Sound power LWA, guaranteed	93.0 dB(A)

Chassis

Traction drive	axial piston motor

Shipping and Storage

Shipping weight	2,480.0 - 2,700.0 kg

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

Copyright © 2025 Wacker Neuson SE | www.wackerneuson.com

Dimensions

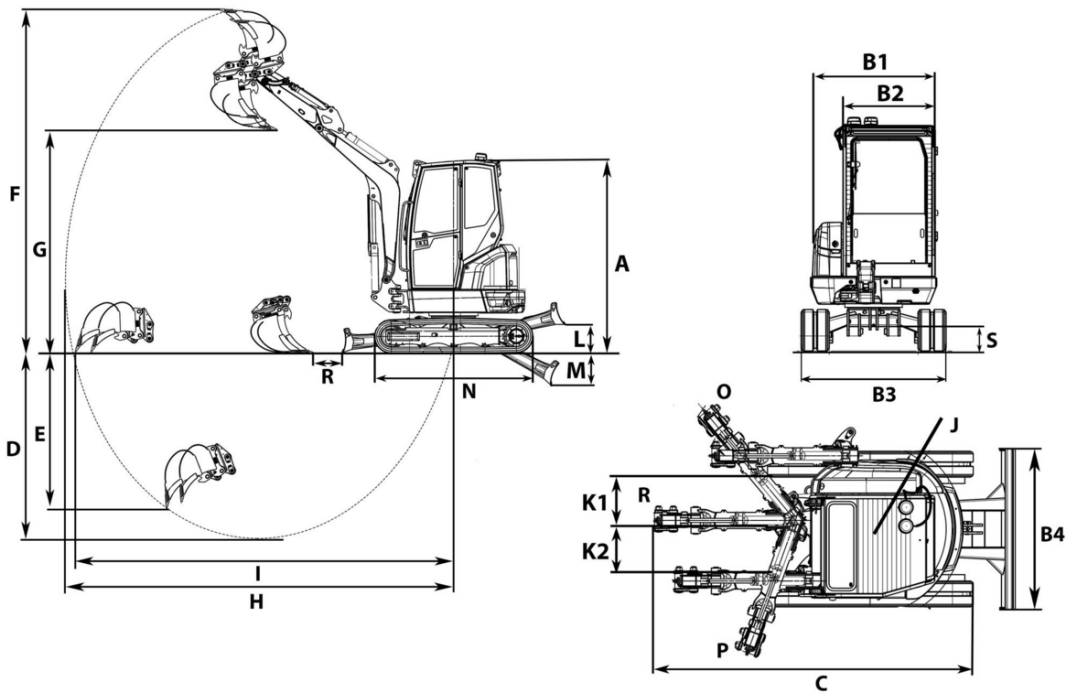

A	Height	2,412 mm
	Total height with rotating beacon	2,502 mm
B1	Width of upper carriage	1,350 mm
B2	Width of cab	980 mm
B3	Width travel gear	1,550 mm
C	Transport length short shovel arm	4,199 mm
	Transport length long shovel arm	4,212 mm
D	Digging depth max., short shovel arm	2,603 mm
	Digging depth max., long shovel arm	2,803 mm
E	Piercing depth max., short shovel arm	1,124 mm
	Piercing depth max., long shovel arm	1,281 mm
F	Piercing height max., short shovel arm	4,151 mm
	Piercing height max., long shovel arm	4,280 mm
G	Dumping height max., short shovel arm	2,764 mm
	Dumping height max., long shovel arm	2,893 mm
H	Digging radius max., short shovel arm	4,622 mm
	Digging radius max., long shovel arm	4,813 mm
I	Max. reach at ground level (short shovel arm)	4,508 mm
	Max. reach at ground level (long shovel arm)	4,706 mm
J	Tail swing radius	819 mm
	Tail swing radius with tail weight	896 mm
K1	Boom offset max. (to center of bucket right side)	622 mm
K2	Boom offset max. (to center of bucket left side)	584 mm
L	Stacking height max. (dozer blade above surface)	374 mm
M	Digging depth max. (dozer blade below surface)	409 mm
N	Length travel drive	1,982 mm
O	Max. swivel angle (arm system to the right)	50 °
P	Max. swivel angle (arm system to the left)	70 °
R	Boom swing radius center	2,102 mm
S	Ground clearance	263 mm

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

Copyright © 2025 Wacker Neuson SE | www.wackerneuson.com

Lifting force tables EZ26

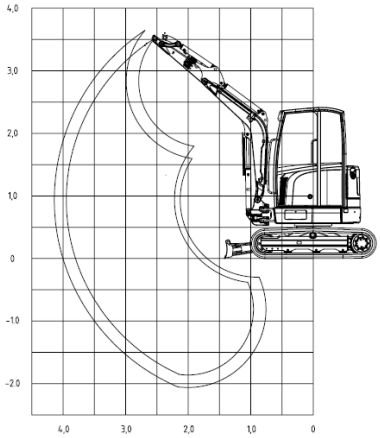

Lifting force table EZ26

max	Permissible load with extended dipper stick
A	Outreach from middle of rotating assembly
B	Load hook height
*****	Lifting force limited by hydraulics
C	With or without dozer blade support in travel direction
D	With or without dozer blade support 90° from the travel direction

All table values are specified in kg (lbs,), in a horizontal position on a solid surface and without a bucket or an attachement.

If a bucket or other attachment is mounted, the lifting force or tipping load is reduced by the device's dead weight.

Base of calculation: according to ISO 10567

The lifting force of the vehicle is limited by the settings of the pressure relief valves and hydraulic performance or by the tipping safety mechanism.

Neither 75% of the static tipping load nor 87% of the hydraulic lifting force are exceeded.

The lifting capability applies for vehicles under the following conditions:

- Lubricants and operating materials at the prescribed levels,
- Full fuel tank,
- Cabin
- Vehicle at operating temperature,
- Weight of the operator 75 kg (165 lbs,)

	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)					
A / **B**	**C**		**D**	**C**		**D**	**C**		**D**	**C**		**D**	**C**		**D**
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	519	552*	436	-	-	-	496	563*	416
(118.1 in)	-	-	-	-	-	-	(1,145)	(1,217)*	(960)	-	-	-	(1,094)	(1,242)*	(918)
2,0 m	-	-	-	634*	634*	572	511	574*	427	396	545*	332	361	545*	302
(78.7 in)	-	-	-	(1,399)*	(1,399)*	(1,261)	(1,126)	(1,266)*	(942)	(874)	(1,202)*	(733)	(795)	(1,202)*	(666)
1,0 m	-	-	-	634	933*	520	481	721*	399	381	608*	318	323	552*	270
(39.4 in)	-	-	-	(1,398)	(2,058)*	(1,147)	(1,061)	(1,589)*	(881)	(841)	(1,341)*	(701)	(713)	(1,217)*	(595)
0,0 m	866	1470*	689	604	1047*	492	461	796*	380	369	636*	307	335	565*	279
(0 in)	(1,910)*	(3,241*)	(1,520)	(1,333)	(2,308)*	(1,086)	(1,016)	(1,755)*	(838)	(814)	(1,403)*	(676)	(739)	(1,245)*	(615)
- 1,0 m	876	1176*	698	607	882*	495	463	663*	382	-	-	-	421	562*	349
(- 39.4 in)	(1,932)	(2,593*)	(1,540)	(1,338)	(1,945)*	(1,090)	(1,020)	(1,462)*	(842)	-	-	-	(929)	(1,240)*	(770)

Tab.1: Lifting force table EZ26 – Rubber track standard 250 mm, cabin, short dipper stick

Lifting force tables EZ26

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)			max		
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	474*	474*	441	-	-	-	435	510*	365
(118.1 in)	-	-	-	-	-	-	(1,045)*	(1,045)*	(973)	-	-	-	(959)	(1,124)*	(805)
2,0 m	-	-	-	-	-	-	513	521*	430	397	501*	333	329	501*	275
(78.7 in)	-	-	-	-	-	-	(1,132)	(1,148)*	(947)	(876)	(1,104)*	(734)	(725)	(1,104)*	(607)
1,0 m	-	-	-	638	870*	523	482	681*	399	380	580*	316	297	510*	248
(39.4 in)	-	-	-	(1,406)	(1,918)*	(1,154)	(1,062)	(1,502)*	(881)	(837)	(1,279)*	(697)	(656)	(1,124)*	(546)
0,0 m	858	1500*	682	600	1039*	488	457	786*	376	365	633*	302	306	524*	254
(0 in)	(1,893)	(3,308)*	(1,503)	(1,323)	(2,290)*	(1,076)	(1,007)	(1,734)*	(829)	(804)	(1,395)*	(665)	(675)	(1,156)*	(560)
- 1,0 m	863	1271*	686	597	933*	485	454	710*	373	-	-	-	373	531*	309
(- 39.4 in)	(1,902)	(2,802)*	(1,512)	(1,316)	(2,057)*	(1,069)	(1000)	(1,567)*	(822)	-	-	-	(822)	(1,171)*	(680)
-2 m	552*	552*	552*	-	-	-	-	-	-	-	-	-	424*	424*	424*
-(9' - 10")	(1,217)*	(1,217)*	(1,217)*	-	-	-	-	-	-	-	-	-	(934)*	(934)*	(934)*

Tab.2: Lifting force table EZ26 – Rubber track standard 250 mm, cabin, long dipper stick

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)			max		
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	552*	552*	477	-	-	-	542	563*	456
(118.1 in)	-	-	-	-	-	-	(1,217)*	(1,217)*	(1,051)	-	-	-	(1,194)	(1,242)*	(1,006)
2,0 m	-	-	-	634*	634*	624	558	574*	469	435	545*	366	396	545*	334
(78.7 in)	-	-	-	(1,399)*	(1,399)*	(1,376)	(1,230)	(1,266)*	(1,033)	(958)	(1,202)*	(808)	(874)	(1,202)*	(736)
1,0 m	-	-	-	694	933*	572	528	721*	441	419	608*	352	357	552*	300
(39.4 in)	-	-	-	(1,531)	(2,058)*	(1,262)	(1,165)	(1,589)*	(972)	(925)	(1,341)*	(776)	(787)	(1,217)*	(661)
0,0 m	951	1470*	761	665	1047*	545	508	796*	421	408	636*	340	370	565*	310
(0 in)	(2,098)	(3,241)*	(1,678)	(1,466)	(2,308)*	(1,201)	(1,120)	(1,755)*	(929)	(899)	(1,403)*	(751)	(816)	(1,245)*	(684)
- 1,0 m	961	1176*	770	667	882*	547	510	663*	423	-	-	-	464	562*	387
(- 39.4 in)	(2,120)	(2,593)*	(1,699)	(1,471)	(1,945)*	(1,206)	(1,124)	(1,462)*	(933)	-	-	-	(1,024)	(1,240)*	(853)

Tab.3: Lifting force table EZ26 – Rubber track standard 250 mm, cabin, short dipper stick, additional counter weight

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)			max		
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	474*	474*	474*	-	-	-	476	510*	401
(118.1 in)	-	-	-	-	-	-	(1,045)*	(1,045)*	(1,045)*	-	-	-	(1,050)	(1,124)*	(885)
2,0 m	-	-	-	-	-	-	521*	521*	471	436	501*	367	362	501*	305
(78.7 in)	-	-	-	-	-	-	(1,148)*	(1,148)*	(1,038)	(960)	(1,104)*	(809)	(799)	(1,104)*	(672)
1,0 m	-	-	-	698	870*	576	528	681*	441	418	580*	350	329	510*	276
(39.4 in)	-	-	-	(1,540)	(1,918)*	(1,270)	(1,165)	(1,502)*	(972)	(922)	(1,279)*	(772)	(725)	(1,124)*	(608)
0,0 m	944	1500*	754	661	1039*	540	504	786*	417	403	633*	336	339	524*	283
(0 in)	(2,081)	(3,308)*	(1,662)	(1,457)	(2,290)*	(1,192)	(1,111)	(1,734)*	(920)	(888)	(1,395)*	(740)	(748)	(1,156)*	(625)
- 1,0 m	948	1271*	758	657	933*	537	500	710*	414	-	-	-	412	531*	343
(- 39.4 in)	(2,090)	(2,802)*	(1,670)	(1,450)	(2,057)*	(1,185)	(1,103)	(1,567)*	(913)	-	-	-	(908)	(1,171)*	(756)
-2 m	552*	552*	552*	-	-	-	-	-	-	-	-	-	424*	424*	424*
-(9' - 10")	(1,217)*	(1,217)*	(1,217)*	-	-	-	-	-	-	-	-	-	(934)*	(934)*	(934)*

Tab.4: Lifting force table EZ26 – Rubber track standard 250 mm, cabin, long dipper stick, additional counter weight

Lifting force tables EZ26

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)			max		
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	493	552*	414	-	-	-	471	563*	395
(118.1 in)	-	-	-	-	-	-	(1,087)	(1,217)*	(913)	-	-	-	(1,038)	(1,242)*	(872)
2,0 m	-	-	-	634*	634*	544	484	574*	406	375	545*	315	340	545*	285
(78.7 in)	-	-	-	(1,399)*	(1,399)*	(1,200)	(1,068)	(1,266)*	(895)	(826)	(1,202)*	(694)	(750)	(1,202)*	(629)
1,0 m	-	-	-	600	933*	492	455	721*	378	360	608*	300	305	552*	254
(39.4 in)	-	-	-	(1,322)	(2,058)*	(1,086)	(1,003)	(1,589)*	(833)	(793)	(1,341)*	(662)	(671)	(1,217)*	(561)
0,0 m	818	1470*	651	570	1047*	465	434	796*	358	348	636*	289	315	565*	262
(0 in)	(1,803)	(3,241)*	(1,436)	(1,257)	(2,308)*	(1,025)	(958)	(1,755)*	(790)	(767)	(1,403)*	(637)	(696)	(1,245)*	(579)
- 1,0 m	828	1176*	661	573	882*	467	436	663*	360	-	-	-	397	562*	329
(- 39.4 in)	(1,826)	(2,593)*	(1,457)	(1,262)	(1,945)*	(1,030)	(962)	(1,462)*	(794)	-	-	-	(876)	(1,240)*	(726)

Tab.5: Lifting force table EZ26 – Rubber track standard 250 mm, Canopy, short dipper stick

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)			max		
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	474*	474*	420	-	-	-	412	510*	346
(118.1 in)	-	-	-	-	-	-	(1,045)*	(1,045)*	(925)	-	-	-	(909)	(1,124)*	(763)
2,0 m	-	-	-	-	-	-	487	521*	408	376	501*	315	310	501*	260
(78.7 in)	-	-	-	-	-	-	(1,074)	(1,148)*	(899)	(828)	(1,104)*	(695)	(684)	(1,104)*	(572)
1,0 m	-	-	-	604	870*	496	455	681*	378	358	580*	298	280	510*	233
(39.4 in)	-	-	-	(1,331)	(1,918)*	(1,093)	(1,003)	(1,502)*	(833)	(789)	(1,279)*	(658)	(616)	(1,124)*	(513)
0,0 m	810	1500*	644	566	1039*	460	430	786*	354	343	633*	284	288	524*	239
(0 in)	(1,786)	(3,308)*	(1,420)	(1,248)	(2,290)*	(1,015)	(949)	(1,734)*	(781)	(756)	(1,395)*	(626)	(634)	(1,156)*	(526)
- 1,0 m	814	1271*	648	563	933*	457	427	710*	351	-	-	-	351	531*	290
(- 39.4 in)	(1,796)	(2,802)*	(1,428)	(1,241)	(2,057)*	(1,009)	(942)	(1,567)*	(774)	-	-	-	(773)	(1,171)*	(640)
-2 m	552*	552*	552*	-	-	-	-	-	-	-	-	-	424*	424*	424*
-(9' - 10")	(1,217)*	(1,217)*	(1,217)*	-	-	-	-	-	-	-	-	-	(934)*	(934)*	(934)*

Tab.6: Lifting force table EZ26 – Rubber track standard 250 mm, Canopy, long dipper stick

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)			max		
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	540	552*	455	-	-	-	516	563*	435
(118.1 in)	-	-	-	-	-	-	(1,190)	(1,217)*	(1,004)	-	-	-	(1,138)	(1,242)*	(960)
2,0 m	-	-	-	634*	634*	597	531	574*	447	413	545*	348	376	545*	317
(78.7 in)	-	-	-	(1,399)*	(1,399)*	(1,316)	(1,171)	(1,266)*	(986)	(910)	(1,202)*	(768)	(829)	(1,202)*	(699)
1,0 m	-	-	-	660	933*	545	502	721*	419	398	608*	334	338	552*	284
(39.4 in)	-	-	-	(1,456)	(2,058)*	(1,202)	(1,106)	(1,589)*	(924)	(877)	(1,341)*	(737)	(745)	(1,217)*	(626)
0,0 m	903	1470*	723	631	1047*	517	481	796*	400	386	636*	323	350	565*	294
(0 in)	(1,991)	(3,241)*	(1,595)	(1,391)	(2,308)*	(1,141)	(1,061)	(1,755)*	(881)	(851)	(1,403)*	(711)	(773)	(1,245)*	(648)
- 1,0 m	913	1176*	733	633	882*	519	483	663*	401	-	-	-	440	562*	367
(- 39.4 in)	(2,014)	(2,593)*	(1,615)	(1,396)	(1,945)*	(1,145)	(1,065)	(1,462)*	(885)	-	-	-	(970)	(1,240)*	(810)

Tab.7: Lifting force table EZ26 – Rubber track standard 250 mm, Canopy, short dipper stick, additional counter weight

Lifting force tables EZ26

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)			max		
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	474*	474*	461	-	-	-	453	510*	382
(118.1 in)	-	-	-	-	-	-	(1,045)*	(1,045)*	(1,016)	-	-	-	(999)	(1,124)*	(843)
2,0 m	-	-	-	-	-	-	521*	521*	449	414	501*	349	343	501*	289
(78.7 in)	-	-	-	-	-	-	(1,148)*	(1,148)*	(990)	(913)	(1,104)*	(770)	(757)	(1,104)*	(638)
1,0 m	-	-	-	664	870*	548	502	681*	419	396	580*	332	311	510*	261
(39.4 in)	-	-	-	(1,464)	(1,918)*	(1,209)	(1,107)	(1,502)*	(924)	(874)	(1,279)*	(733)	(686)	(1,124)*	(575)
0,0 m	895	1500*	716	626	1039*	513	477	786*	396	381	633*	318	320	524*	268
(0 in)	(1,974)	(3,308)*	(1,578)	(1,381)	(2,290)*	(1,131)	(1,052)	(1,734)*	(872)	(841)	(1,395)*	(701)	(707)	(1,156)*	(591)
- 1,0 m	900	1271*	720	623	933*	510	474	710*	392	-	-	-	390	531*	325
(- 39.4 in)	(1,984)	(2,802)*	(1,587)	(1,374)	(2,057)*	(1,124)	(1,045)	(1,567)*	(865)	-	-	-	(859)	(1,171)*	(716)
-2 m	552*	552*	552*	-	-	-	-	-	-	-	-	-	424*	424*	424*
-(9' - 10")	(1,217)*	(1,217)*	(1,217)*	-	-	-	-	-	-	-	-	-	(934)*	(934)*	(934)*

Tab.8: Lifting force table EZ26 – Rubber track standard 250 mm, Canopy, long dipper stick, additional counter weight

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)			max		
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	525	552*	440	-	-	-	501	563*	420
(118.1 in)	-	-	-	-	-	-	(1,157)	(1,217)*	(970)	-	-	-	(1,106)	(1,242)*	(927)
2,0 m	-	-	-	634*	634*	577	516	574*	432	401	545*	336	365	545*	305
(78.7 in)	-	-	-	(1,399)*	(1,399)*	(1,273)	(1,138)	(1,266)*	(952)	(883)	(1,202)*	(741)	(804)	(1,202)*	(673)
1,0 m	-	-	-	641	933*	525	487	721*	404	386	608*	321	327	552*	273
(39.4 in)	-	-	-	(1,413)	(2,058)*	(1,158)	(1,073)	(1,589)*	(890)	(850)	(1,341)*	(709)	(721)	(1,217)*	(602)
0,0 m	876	1470*	697	611	1047*	498	466	796*	384	374	636*	310	339	565*	282
(0 in)	(1,931)	(3,241)*	(1,536)	(1,348)	(2,308)*	(1,098)	(1,028)	(1,755)*	(847)	(824)	(1,403)*	(684)	(748)	(1,245)*	(622)
- 1,0 m	886	1176*	706	613	882*	500	468	663*	386	-	-	-	426	562*	353
(- 39.4 in)	(1,953)	(2,593)*	(1,556)	(1,353)	(1,945)*	(1,102)	(1,032)	(1,462)*	(851)	-	-	-	(940)	(1,240)*	(779)

Tab.9: Lifting force table EZ26 – Rubber track Option 300 mm, cabin, short dipper stick

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)			max		
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	474*	474*	446	-	-	-	440	510*	369
(118.1 in)	-	-	-	-	-	-	(1,045)*	(1,045)*	(982)	-	-	-	(970)	(1,124)*	(813)
2,0 m	-	-	-	-	-	-	519	521*	434	402	501*	337	333	501*	278
(78.7 in)	-	-	-	-	-	-	(1,144)	(1,148)*	(956)	(885)	(1,104)*	(742)	(734)	(1,104)*	(613)
1,0 m	-	-	-	645	870*	529	487	681*	404	384	580*	320	301	510*	250
(39.4 in)	-	-	-	(1,421)	(1,918)*	(1,166)	(1,073)	(1,502)*	(890)	(847)	(1,279)*	(705)	(664)	(1,124)*	(552)
0,0 m	868	1500*	689	607	1039*	493	462	786*	380	369	633*	305	310	524*	257
(0 in)	(1,914)	(3,308)*	(1,519)	(1,338)	(2,290)*	(1,088)	(1,019)	(1,734)*	(838)	(813)	(1,395)*	(673)	(683)	(1,156)*	(567)
- 1,0 m	872	1271*	693	604	933*	490	459	710*	377	-	-	-	377	531*	312
(- 39.4 in)	(1,923)	(2,802)*	(1,528)	(1,331)	(2,057)*	(1,081)	(1,012)	(1,567)*	(831)	-	-	-	(831)	(1,171)*	(688)
-2 m	552*	552*	552*	-	-	-	-	-	-	-	-	-	424*	424*	424*
-(9' - 10")	(1,217)*	(1,217)*	(1,217)*	-	-	-	-	-	-	-	-	-	(934)*	(934)*	(934)*

Tab.10: Lifting force table EZ26 – Rubber track Option 300 mm, cabin, long dipper stick

Lifting force tables EZ26

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)					
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	552*	552*	481	-	-	-	547	563*	460
(118.1 in)	-	-	-	-	-	-	(1,217)*	(1,217)*	(1,061)	-	-	-	(1,206)	(1,242)*	(1,015)
2,0 m	-	-	-	634*	634*	630	563	574*	473	439	545*	370	400	545*	337
(78.7 in)	-	-	-	(1,399)*	(1,399)*	(1,388)	(1,241)	(1,266)*	(1,043)	(968)	(1,202)*	(815)	(883)	(1,202)*	(743)
1,0 m	-	-	-	701	933*	578	533	721*	445	424	608*	355	361	552*	303
(39.4 in)	-	-	-	(1,546)	(2,058)*	(1,274)	(1,176)	(1,589)*	(981)	(934)	(1,341)*	(784)	(795)	(1,217)*	(668)
0,0 m	961	1470*	769	672	1047*	550	513	796*	426	412	636*	344	374	565*	313
(0 in)	(2,119)	(3,241)*	(1,695)	(1,481)	(2,308)*	(1,213)	(1,131)	(1,755)*	(938)	(908)	(1,403)*	(758)	(825)	(1,245)*	(691)
- 1,0 m	971	1176*	778	674	882*	552	515	663*	427	-	-	-	469	562*	391
(- 39.4 in)	(2,141)	(2,593)*	(1,715)	(1,486)	(1,945)*	(1,218)	(1,135)	(1,462)*	(942)	-	-	-	(1,034)	(1,240)*	(862)

Tab.11: Lifting force table EZ26 – Rubber track Option 300 mm, cabin, short dipper stick, additional counter weight

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)					
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	474*	474*	474*	-	-	-	481	510*	405
(118.1 in)	-	-	-	-	-	-	(1,045)*	(1,045)*	(1,045)*	-	-	-	(1,060)	(1,124)*	(893)
2,0 m	-	-	-	-	-	-	521*	521*	475	440	501*	370	366	501*	308
(78.7 in)	-	-	-	-	-	-	(1,148)*	(1,148)*	(1,047)	(970)	(1,104)*	(817)	(807)	(1,104)*	(679)
1,0 m	-	-	-	705	870*	581	534	681*	445	422	580*	354	332	510*	279
(39.4 in)	-	-	-	(1,555)	(1,918)*	(1,281)	(1,177)	(1,502)*	(981)	(931)	(1,279)*	(780)	(733)	(1,124)*	(614)
0,0 m	953	1500*	761	667	1039*	546	509	786*	421	407	633*	339	343	524*	286
(0 in)	(2,102)	(3,308)*	(1,678)	(1,472)	(2,290)*	(1,204)	(1,122)	(1,734)*	(929)	(898)	(1,395)*	(748)	(756)	(1,156)*	(631)
- 1,0 m	958	1271*	765	664	933*	543	506	710*	418	-	-	-	416	531*	347
(- 39.4 in)	(2,111)	(2,802)*	(1,687)	(1,465)	(2,057)*	(1,197)	(1,115)	(1,567)*	(922)	-	-	-	(917)	(1,171)*	(764)
-2 m	552*	552*	552*	-	-	-	-	-	-	-	-	-	424*	424*	424*
-(9' - 10")	(1,217)*	(1,217)*	(1,217)*	-	-	-	-	-	-	-	-	-	(934)*	(934)*	(934)*

Tab.12: Lifting force table EZ26 – Rubber track Option 300 mm, cabin, long dipper stick, additional counter weight

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)					
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	498	552*	418	-	-	-	476	563*	399
(118.1 in)	-	-	-	-	-	-	(1,098)	(1,217)*	(922)	-	-	-	(1,049)	(1,242)*	(881)
2,0 m	-	-	-	634*	634*	550	490	574*	410	379	545*	318	344	545*	289
(78.7 in)	-	-	-	(1,399)*	(1,399)*	(1,212)	(1,079)	(1,266)*	(904)	(836)	(1,202)*	(701)	(759)	(1,202)*	(637)
1,0 m	-	-	-	607	933*	498	460	721*	382	364	608*	304	308	552*	257
(39.4 in)	-	-	-	(1,337)	(2,058)*	(1,098)	(1,015)	(1,589)*	(842)	(802)	(1,341)*	(669)	(680)	(1,217)*	(567)
0,0 m	827	1470*	689	577	1047*	470	440	796*	363	352	636*	292	319	565*	266
(0 in)	(1,824)	(3,241)*	(1,520)	(1,272)	(2,308)*	(1,037)	(970)	(1,755)*	(800)	(776)	(1,403)*	(644)	(704)	(1,245)*	(586)
- 1,0 m	838	1176*	698	579	882*	472	442	663*	364	-	-	-	402	562*	333
(- 39.4 in)	(1,847)	(2,593)*	(1,540)	(1,277)	(1,945)*	(1,042)	(974)	(1,462)*	(804)	-	-	-	(887)	(1,240)*	(735)

Tab.13: Lifting force table EZ26 – Rubber track Option 300 mm, Canopy, short dipper stick

Lifting force tables EZ26

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)					
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	474*	474*	424	-	-	-	417	510*	350
(118.1 in)	-	-	-	-	-	-	(1,045)*	(1,045)*	(935)	-	-	-	(919)	(1,124)*	(771)
2,0 m	-	-	-	-	-	-	492	521*	412	380	501*	319	314	501*	263
(78.7 in)	-	-	-	-	-	-	(1,085)	(1,148)*	(909)	(838)	(1,104)*	(703)	(692)	(1,104)*	(579)
1,0 m	-	-	-	610	870*	501	460	681*	382	362	580*	302	283	510*	236
(39.4 in)	-	-	-	(1,346)	(1,918)*	(1,105)	(1,015)	(1,502)*	(842)	(799)	(1,279)*	(666)	(624)	(1,124)*	(520)
0,0 m	820	1500*	651	573	1039*	466	436	786*	359	347	633*	287	291	524*	242
(0 in)	(1,807)	(3,308)*	(1,436)	(1,263)	(2,290)*	(1,027)	(961)	(1,734)*	(791)	(766)	(1,395)*	(634)	(642)	(1,156)*	(533)
- 1,0 m	824	1271*	655	570	933*	463	432	710*	355	-	-	-	355	531*	294
(- 39.4 in)	(1,817)	(2,802)*	(1,445)	(1,256)	(2,057)*	(1,021)	(953)	(1,567)*	(783)	-	-	-	(783)	(1,171)*	(648)
-2 m	552*	552*	552*	-	-	-	-	-	-	-	-	-	424*	424*	424*
-(9' - 10")	(1,217)*	(1,217)*	(1,217)*	-	-	-	-	-	-	-	-	-	(934)*	(934)*	(934)*

Tab.14: Lifting force table EZ26 – Rubber track Option 300 mm, Canopy, long dipper stick

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)					
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	545	552*	459	-	-	-	521	563*	439
(118.1 in)	-	-	-	-	-	-	(1,202)	(1,217)*	(1,013)	-	-	-	(1,149)	(1,242)*	(969)
2,0 m	-	-	-	634*	634*	602	536	574*	451	417	545*	352	380	545*	320
(78.7 in)	-	-	-	(1,399)*	(1,399)*	(1,328)	(1,183)	(1,266)*	(995)	(920)	(1,202)*	(776)	(838)	(1,202)*	(707)
1,0 m	-	-	-	667	933*	550	507	721*	423	402	608*	338	342	552*	287
(39.4 in)	-	-	-	(1,471)	(2,058)*	(1,213)	(1,118)	(1,589)*	(933)	(887)	(1,341)*	(744)	(754)	(1,217)*	(633)
0,0 m	913	1470*	731	637	1047*	523	487	796*	404	390	636*	326	354	565*	297
(0 in)	(2,012)	(3,241)*	(1,611)	(1,406)	(2,308)*	(1,152)	(1,073)	(1,755)*	(891)	(860)	(1,403)*	(719)	(781)	(1,245)*	(655)
- 1,0 m	923	1176*	740	640	882*	525	488	663*	406	-	-	-	445	562*	371
(- 39.4 in)	(2,035)	(2,593)*	(1,632)	(1,411)	(1,945)*	(1,157)	(1,077)	(1,462)*	(894)	-	-	-	(981)	(1,240)*	(818)

Tab.15: Lifting force table EZ26 – Rubber track Option 300 mm, Canopy, short dipper stick, additional counter weight

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)					
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	474*	474*	465	-	-	-	457	510*	386
(118.1 in)	-	-	-	-	-	-	(1,045)*	(1,045)*	(1,026)	-	-	-	(1,009)	(1,124)*	(851)
2,0 m	-	-	-	-	-	-	521*	521*	453	418	501*	353	347	501*	292
(78.7 in)	-	-	-	-	-	-	(1,148)*	(1,148)*	(1000)	(922)	(1,104)*	(778)	(766)	(1,104)*	(645)
1,0 m	-	-	-	671	870*	554	507	681*	423	401	580*	336	315	510*	264
(39.4 in)	-	-	-	(1,479)	(1,918)*	(1,221)	(1,118)	(1,502)*	(933)	(883)	(1,279)*	(740)	(694)	(1,124)*	(582)
0,0 m	905	1500*	723	633	1039*	518	483	786*	400	386	633*	321	324	524*	271
(0 in)	(1,995)	(3,308)*	(1,595)	(1,396)	(2,290)*	(1,143)	(1,064)	(1,734)*	(881)	(850)	(1,395)*	(709)	(715)	(1,156)*	(598)
- 1,0 m	909	1271*	727	630	933*	515	479	710*	397	-	-	-	394	531*	328
(- 39.4 in)	(2,005)	(2,802)*	(1,603)	(1,389)	(2,057)*	(1,136)	(1,057)	(1,567)*	(874)	-	-	-	(869)	(1,171)*	(724)
-2 m	552*	552*	552*	-	-	-	-	-	-	-	-	-	424*	424*	424*
-(9' - 10")	(1,217)*	(1,217)*	(1,217)*	-	-	-	-	-	-	-	-	-	(934)*	(934)*	(934)*

Tab.16: Lifting force table EZ26 – Rubber track Option 300 mm, Canopy, long dipper stick, additional counter weight

Lifting force tables EZ26

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)			max		
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	556*	556*	490	-	-	-	568*	568*	469
(118.1 in)	-	-	-	-	-	-	(1,227)*	(1,227)*	(1,080)	-	-	-	(1,251)*	(1,251)*	(1,034)
2,0 m	-	-	-	639*	639*	639*	579*	579*	482	473	549*	377	432	549*	344
(78.7 in)	-	-	-	(1,409)*	(1,409)*	(1,409)*	(1,276)*	(1,276)*	(1,062)	(1,043)	(1,211)*	(832)	(953)	(1,211)*	(759)
1,0 m	-	-	-	757	941*	589	576	726*	454	458	613*	363	390	556*	309
(39.4 in)	-	-	-	(1,669)	(2,074)*	(1,298)	(1,270)	(1,602)*	(1,000)	(1,010)	(1,352)*	(800)	(860)	(1,226)*	(682)
0,0 m	1042	1481*	783	727	1055*	561	555	802*	434	446	641*	351	405	569*	320
(0 in)	(2,298)	(3,265)*	(1,727)	(1,604)	(2,325)*	(1,237)	(1,225)	(1,769)*	(958)	(983)	(1,414)*	(775)	(894)	(1,255)*	(706)
- 1,0 m	1052	1185*	792	730	889*	563	557	668*	436	-	-	-	507	567*	399
(- 39.4 in)	(2,320)	(2,613)*	(1,747)	(1,609)	(1,959)*	(1,242)	(1,229)	(1,474)*	(962)	-	-	-	(1,119)	(1,249)*	(880)

Tab.17: Lifting force table EZ26 – steeltrack 300 mm, cabin, short dipper stick

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)			max		
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	477*	477*	477*	-	-	-	513*	513*	413
(118.1 in)	-	-	-	-	-	-	(1,053)*	(1,053)*	(1,053)*	-	-	-	(1,132)*	(1,132)*	(910)
2,0 m	-	-	-	-	-	-	525*	525*	484	474	504*	378	396	504*	314
(78.7 in)	-	-	-	-	-	-	(1,157)*	(1,157)*	(1,067)	(1,045)	(1,112)*	(833)	(872)	(1,112)*	(693)
1,0 m	-	-	-	761	876*	592	576	686*	454	456	584*	361	360	514*	285
(39.4 in)	-	-	-	(1,678)	(1,933)*	(1,305)	(1,270)	(1,513)*	(1,000)	(1,006)	(1,289)*	(796)	(794)	(1,133)*	(628)
0,0 m	1034	1512*	775	723	1047*	557	551	792*	430	441	638*	347	372	528*	293
(0 in)	(2,281)	(3,334)*	(1,710)	(1,595)	(2,308)*	(1,228)	(1,216)	(1,747)*	(949)	(973)	(1,406)*	(764)	(820)	(1,165)*	(646)
- 1,0 m	1039	1280*	779	720	940*	554	548	716*	427	-	-	-	451	535*	354
(- 39.4 in)	(2,291)	(2,823)*	(1,719)	(1,587)	(2,073)*	(1,221)	(1,208)	(1,579)*	(942)	-	-	-	(994)	(1,180)*	(781)
-2 m	556*	556*	556*	-	-	-	-	-	-	-	-	-	427*	427*	427*
-(6' - 7")	(1,226)*	(1,226)*	(1,226)*	-	-	-	-	-	-	-	-	-	(942)*	(942)*	(942)*

Tab.18: Lifting force table EZ26 – steeltrack 300 mm, cabin, long dipper stick

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)			max		
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	556*	556*	531	-	-	-	568*	568*	509
(118.1 in)	-	-	-	-	-	-	(1,227)*	(1,227)*	(1,170)	-	-	-	(1,251)*	(1,251)*	(1,122)
2,0 m	-	-	-	639*	639*	639*	579*	579*	523	512	549*	411	468	549*	376
(78.7 in)	-	-	-	(1,409)*	(1,409)*	(1,409)*	(1,276)*	(1,276)*	(1,152)	(1,128)	(1,211)*	(906)	(1,032)	(1,211)*	(829)
1,0 m	-	-	-	818	941*	641	623	726*	495	497	613*	397	424	556*	339
(39.4 in)	-	-	-	(1,805)	(2,074)*	(1,413)	(1,374)	(1,602)*	(1,091)	(1,095)	(1,352)*	(875)	(935)	(1,226)*	(748)
0,0 m	1129	1481*	855	789	1055*	613	603	802*	475	485	641*	385	441	569*	351
(0 in)	(2,489)	(3,265)*	(1,885)	(1,739)	(2,325)*	(1,352)	(1,329)	(1,769)*	(1,048)	(1,069)	(1,414)*	(849)	(972)	(1,255)*	(774)
- 1,0 m	1139	1185*	864	791	889*	616	605	668*	477	-	-	-	551	567*	437
(- 39.4 in)	(2,512)	(2,613)*	(1,905)	(1,744)	(1,959)*	(1,357)	(1,333)	(1,474)*	(1,052)	-	-	-	(1,214)	(1,249)*	(963)

Tab.19: Lifting force table EZ26 – steeltrack 300 mm, cabin, short dipper stick, additional counter weight

Lifting force tables EZ26

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)			max		
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	477*	477*	477*	-	-	-	513*	513*	449
(118.1 in)	-	-	-	-	-	-	(1,053)*	(1,053)*	(1,053)*	-	-	-	(1,132)*	(1,132)*	(990)
2,0 m	-	-	-	-	-	-	525*	525*	525*	504*	504*	412	429	504*	344
(78.7 in)	-	-	-	-	-	-	(1,157)*	(1,157)*	(1,157)*	(1,112)*	(1,112)*	(908)	(947)	(1,112)*	(759)
1,0 m	-	-	-	822	876*	644	624	686*	495	495	584*	395	392	514*	313
(39.4 in)	-	-	-	(1,813)	(1,933)*	(1,420)	(1,375)	(1,513)*	(1,091)	(1,092)	(1,289)*	(871)	(864)	(1,133)*	(690)
0,0 m	1121	1512*	847	784	1047*	609	599	792*	471	480	638*	380	405	528*	322
(0 in)	(2,472)	(3,334)*	(1,868)	(1,730)	(2,308)*	(1,343)	(1,320)	(1,747)*	(1,039)	(1,058)	(1,406)*	(839)	(893)	(1,165)*	(710)
- 1,0 m	1126	1280*	851	781	940*	606	595	716*	468	-	-	-	490	535*	388
(- 39.4 in)	(2,482)	(2,823)*	(1,877)	(1,723)	(2,073)*	(1,336)	(1,313)	(1,579)*	(1,032)	-	-	-	(1,080)	(1,180)*	(856)
-2 m	556*	556*	556*	-	-	-	-	-	-	-	-	-	427*	427*	427*
-(6' - 7")	(1,226)*	(1,226)*	(1,226)*	-	-	-	-	-	-	-	-	-	(942)*	(942)*	(942)*

Tab.20: Lifting force table EZ26 – steeltrack 300 mm, cabin, long dipper stick, additional counter weight

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)			max		
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	556*	556*	468	-	-	-	562	568*	448
(118.1 in)	-	-	-	-	-	-	(1,227)*	(1,227)*	(1,033)	-	-	-	(1,239)	(1,251)*	(988)
2,0 m	-	-	-	639*	639*	613	578	579*	460	451	549*	359	411	549*	328
(78.7 in)	-	-	-	(1,409)*	(1,409)*	(1,352)	(1,275)	(1,276)*	(1,015)	(994)	(1,211)*	(793)	(907)	(1,211)*	(722)
1,0 m	-	-	-	722	941*	561	549	726*	432	436	613*	345	371	556*	294
(39.4 in)	-	-	-	(1,592)	(2,074)*	(1,238)	(1,210)	(1,602)*	(953)	(961)	(1,352)*	(761)	(818)	(1,226)*	(648)
0,0 m	993	1481*	746	692	1055*	534	528	802*	413	424	641*	334	385	569*	304
(0 in)	(2,189)	(3,265)*	(1,644)	(1,527)	(2,325)*	(1,177)	(1,165)	(1,769)*	(910)	(935)	(1,414)*	(736)	(849)	(1,255)*	(670)
- 1,0 m	1003	1185*	755	695	889*	536	530	668*	415	-	-	-	483	567*	379
(- 39.4 in)	(2,212)	(2,613)*	(1,664)	(1,532)	(1,959)*	(1,182)	(1,169)	(1,474)*	(914)	-	-	-	(1,064)	(1,249)*	(836)

Tab.21: Lifting force table EZ26 – steeltrack 300 mm, Canopy, short dipper stick

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)			max		
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	477*	477*	474	-	-	-	494	513*	394
(118.1 in)	-	-	-	-	-	-	(1,053)*	(1,053)*	(1,045)	-	-	-	(1,089)	(1,132)*	(869)
2,0 m	-	-	-	-	-	-	525*	525*	462	452	504*	360	376	504*	299
(78.7 in)	-	-	-	-	-	-	(1,157)*	(1,157)*	(1,019)	(997)	(1,112)*	(794)	(830)	(1,112)*	(659)
1,0 m	-	-	-	726	876*	565	549	686*	432	434	584*	343	342	514*	270
(39.4 in)	-	-	-	(1,601)	(1,933)*	(1,245)	(1,211)	(1,513)*	(953)	(958)	(1,289)*	(757)	(754)	(1,133)*	(596)
0,0 m	985	1512*	738	688	1047*	529	524	792*	409	419	638*	329	353	528*	278
(0 in)	(2,172)	(3,334)*	(1,627)	(1,518)	(2,308)*	(1,168)	(1,156)	(1,747)*	(901)	(924)	(1,406)*	(725)	(778)	(1,165)*	(612)
- 1,0 m	990	1280*	742	685	940*	526	521	716*	406	-	-	-	428	535*	336
(- 39.4 in)	(2,182)	(2,823)*	(1,636)	(1,510)	(2,073)*	(1,161)	(1,149)	(1,579)*	(894)	-	-	-	(944)	(1,180)*	(741)
-2 m	556*	556*	556*	-	-	-	-	-	-	-	-	-	427*	427*	427*
-(6' - 7")	(1,226)*	(1,226)*	(1,226)*	-	-	-	-	-	-	-	-	-	(942)*	(942)*	(942)*

Tab.22: Lifting force table EZ26 – steeltrack 300 mm, Canopy, long dipper stick

Lifting force tables EZ26

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)					
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	556*	556*	509	-	-	-	568*	568*	488
(118.1 in)	-	-	-	-	-	-	(1,227)*	(1,227)*	(1,123)	-	-	-	(1,251)*	(1,251)*	(1,076)
2,0 m	-	-	-	639*	639*	639*	579*	579*	501	490	549*	393	448	549*	359
(78.7 in)	-	-	-	(1,409)*	(1,409)*	(1,409)*	(1,276)*	(1,276)*	(1,105)	(1,080)	(1,211)*	(867)	(987)	(1,211)*	(792)
1,0 m	-	-	-	784	941*	614	596	726*	473	475	613*	379	405	556*	324
(39.4 in)	-	-	-	(1,728)	(2,074)*	(1,353)	(1,315)	(1,602)*	(1,044)	(1,047)	(1,352)*	(835)	(893)	(1,226)*	(713)
0,0 m	1080	1481*	817	754	1055*	586	576	802*	454	463	641*	367	421	569*	335
(0 in)	(2,380)	(3,265)*	(1,802)	(1,662)	(2,325)*	(1,292)	(1,270)	(1,769)*	(1,001)	(1,020)	(1,414)*	(810)	(927)	(1,255)*	(738)
- 1,0 m	1090	1185*	826	756	889*	588	578	668*	456	-	-	-	526	567*	417
(- 39.4 in)	(2,403)	(2,613)*	(1,822)	(1,667)	(1,959)*	(1,297)	(1,274)	(1,474)*	(1,005)	-	-	-	(1,160)	(1,249)*	(919)

Tab.23: Lifting force table EZ26 – steeltrack 300 mm, Canopy, short dipper stick, additional counter weight

A / B	2,0 m (78,7 in)			2,5 m (98,4 in)			3,0 m (118,1 in)			3,5 m (137,7 in)					
	C		D	C		D	C		D	C		D	C		D
	Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten		Schild oben	Schild unten	
3,0 m	-	-	-	-	-	-	477*	477*	477*	-	-	-	513*	513*	430
(118.1 in)	-	-	-	-	-	-	(1,053)*	(1,053)*	(1,053)*	-	-	-	(1,132)*	(1,132)*	(948)
2,0 m	-	-	-	-	-	-	525*	525*	503	491	504*	394	410	504*	329
(78.7 in)	-	-	-	-	-	-	(1,157)*	(1,157)*	(1,110)	(1,082)	(1,112)*	(869)	(904)	(1,112)*	(725)
1,0 m	-	-	-	788	876*	617	597	686*	473	473	584*	377	374	514*	298
(39.4 in)	-	-	-	(1,737)	(1,933)*	(1,360)	(1,316)	(1,513)*	(1,043)	(1,043)	(1,289)*	(832)	(825)	(1,133)*	(658)
0,0 m	1072	1512*	810	750	1047*	582	572	792*	450	458	638*	363	386	528*	307
(0 in)	(2,363)	(3,334)*	(1,785)	(1,653)	(2,308)*	(1,283)	(1,261)	(1,747)*	(992)	(1,010)	(1,406)*	(800)	(851)	(1,165)*	(676)
- 1,0 m	1076	1280*	814	746	940*	579	568	716*	447	-	-	-	468	535*	370
(- 39.4 in)	(2,373)	(2,823)*	(1,794)	(1,646)	(2,073)*	(1,276)	(1,253)	(1,579)*	(985)	-	-	-	(1,031)	(1,180)*	(817)
-2 m	556*	556*	556*	-	-	-	-	-	-	-	-	-	427*	427*	427*
-(6' - 7")	(1,226)*	(1,226)*	(1,226)*	-	-	-	-	-	-	-	-	-	(942)*	(942)*	(942)*

Tab.24: Lifting force table EZ26 – steeltrack 300 mm, Canopy, long dipper stick, additional counter weight